



# Lifting Equipment



**S. D. M.**  
Qualified Fittings

HSH-A 622 Lever Blocks




HSH-A 623 Lever Blocks




| Model          |      | HSH-0.75A | HSH-1.5A | HSH-3A | HSH-6A | HSH-9A |
|----------------|------|-----------|----------|--------|--------|--------|
| Capacity       | tons | 0.75      | 1.5      | 3      | 6      | 9      |
| Standard lift  | m    | 1.5       | 1.5      | 1.5    | 1.5    | 1.5    |
| Test load      | Kn   | 11        | 22       | 37.5   | 75     | 112.5  |
| Load chain dia | mm   | 6         | 8        | 10     | 10     | 10     |
| Net weight     | kg   | 7         | 11       | 21     | 31     | 46     |

| Model             |      | HSH-0.75A | HSH-1.5A | HSH-3A | HSH-6A | HSH-9A |
|-------------------|------|-----------|----------|--------|--------|--------|
| Capacity          | tons | 0.75      | 1.5      | 3      | 6      | 9      |
| Standard lift     | m    | 1.5       | 1.5      | 1.5    | 1.5    | 1.5    |
| Running test load | Kn   | 11        | 22.5     | 37.5   | 75     | 112.5  |
| Load chain dia    | mm   | 6         | 8        | 10     | 10     | 10     |
| Net weight        | kg   | 7.5       | 11.5     | 21     | 31.5   | 47     |

Electric Chain Hoist

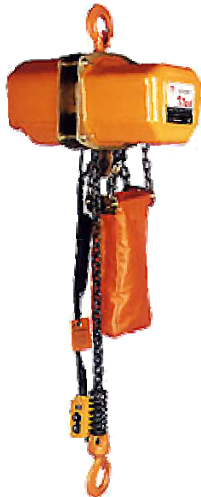

Steel Wire Rope Pulling Hoist

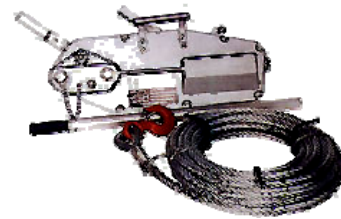

| Model               |       | HHXG-0.5A | HHXG-1.0A | HHXG-2.0A |
|---------------------|-------|-----------|-----------|-----------|
| Capacity            | tons  | 0.5       | 1         | 2         |
| Standard lift       | m     | 3         | 3         | 3         |
| Running test load   | Kn    | 6.3       | 12.5      | 25        |
| Motor power         | Kw    | 0.8       | 1.1       | 1.1       |
| Load chain diameter | mm    | 7.1       | 7.1       | 7.1       |
| Lift speed          | m/min | 5.8       | 4.3       | 2.15      |
| Net weight          | kg    | 44        | 46        | 60        |

| Model            |      | NHSS0.8 | NHSS1.0 | NHSS1.6 | NHSS3.2 |
|------------------|------|---------|---------|---------|---------|
| rated capacity   | tons | 0.8     | 1       | 1.6     | 3.2     |
| forward travel   | mm   | >=52    | >=52    | >=55    | >=28    |
| length of handle | mm   | 825     | 825     | 1200    | 1200    |
| drive step       |      | 1       | 1       | 1       | 2       |
| rope diameter    | mm   | 8       | 8       | 11      | 16      |
| rope length      | m    | 20      | 20      | 20      | 20      |
| net weight       | kg   | 6       | 6       | 12      | 23      |

Permanent Magnetic Lifter, Model ML-A, meet EN 13155



Permanent Magnetic Lifter, Model ML-A, meet EN 13155



| Code                | MLA1 | MLA3 | MLA6 | MLA10 | MLA20 | MLA30 |
|---------------------|------|------|------|-------|-------|-------|
| Lifting Capacity/kg | 100  | 300  | 600  | 1000  | 2000  | 3000  |
| Break away force/N  | 350  | 1050 | 2100 | 3500  | 7000  | 10500 |

| Code                    | MLB1 |
|-------------------------|------|
| Lifting Capacity/kg/Lbs | 100  |
| Max Breaking Force/N    | 500  |